




DESCRIPTION


RAGNOR HYDRAULICS specializes in hydraulic cargo elevators with nonstandard sizes, capacities up to 10 tons, lift height up to 10 meters. We work closely with our clients to solve goods cargo between floors with the most economical and efficient solution. RAGNOR HYDRAULICS cargo elevators are designed with robust structure with supporting frames which enables them to fit any installation site. For every hydraulic cargo elevator, we supply manual guide for easy complete installation.

PRODUCT DIAGRAM

Single Mast Goods Lift

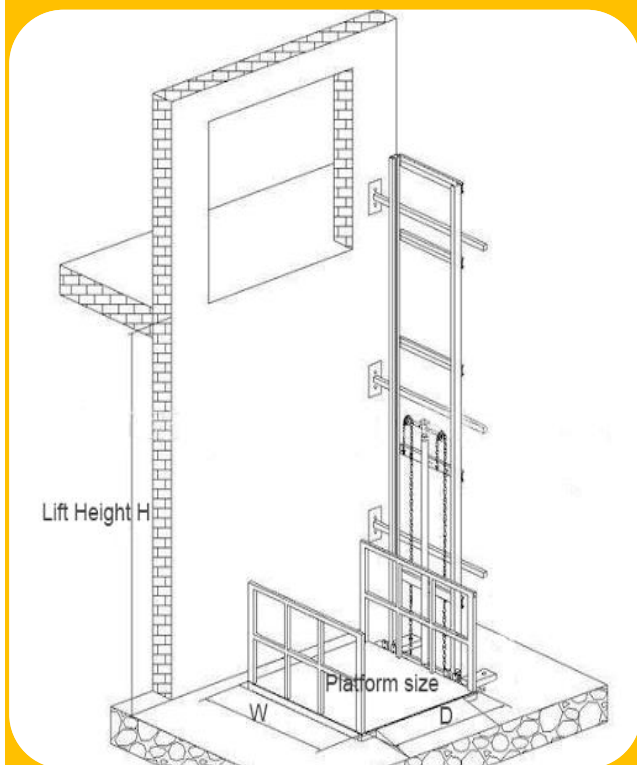

Double Mast Goods Lift

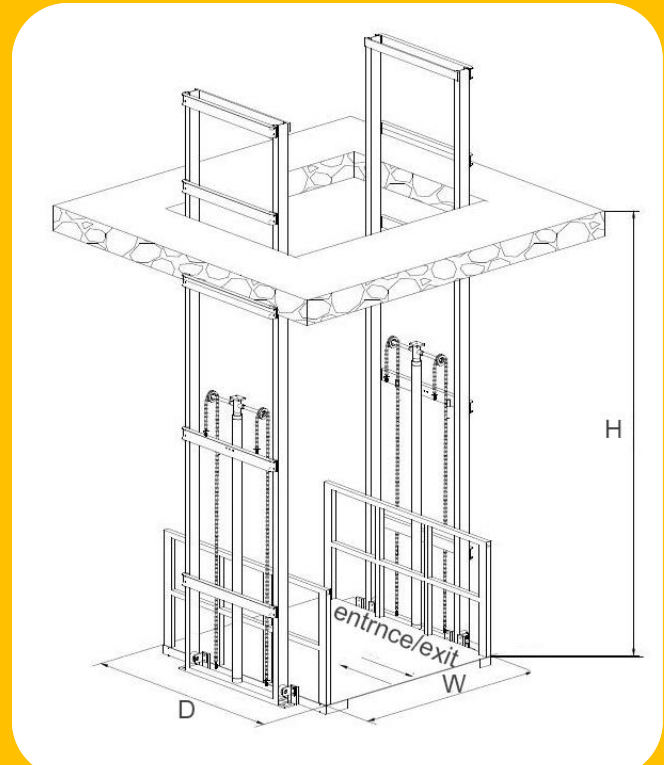

SINGLE MAST HYDRAULIC GOODS LIFT



PRODUCT PARAMETER

Model No.	Capacity (KGS.)	Platform Length (MM)	Platform Width (MM)	Closed Height (MM)	Lifting Height (MM)	Lifting Speed in Mtr (Per /minute)	Motor (HP)	Total Height (MM)
RH-SMGL-500-A	500	900	900	150	4000-8000	3-4	2	4800-8800
RH-SMGL-500-B	500	1200	1200	150	4000-8000	3-4	2	4800-8800
RH-SMGL-500-C	500	1500	1500	200	4000-8000	3-4	2	4800-8000
RH-DSL-2000	1000	600	600	200-250	4000-8000	3	3	4800-8000
RH-DSL-3000	1000	1000	1000	200-250	4000-8000	3	3	4800-8000
RH-DSL-3000	1000	1500	1500	200-250	4000-8000	3	3	4800-8000

*As per customer requirement, technical specification can be changed .

Special Features:

- Less power consumption
- Precisely designed
- Corrosion resistant body
- Platform: As Per Requirement
- Self-Weight: As Per Requirement.

Application

- Warehouses,
- Distribution Centers,
- Factories,
- Self storage

DOUBLE MAST HYDRAULIC GOODS LIFT



PRODUCT PARAMETER

Model No.	Capacity (KGS.)	Platform Length (MM)	Platform Width (MM)	Closed Height (MM)	Lifting Height (MM)	Lifting Speed in Mtr. (Per /minute)	Motor (HP)	Total Height (MM)
RH-DMGL-500-A	500	1000	1000	200	4000-8000	3-4	2	4800-8800
RH-DMGL-500-B	500	1500	1500	200	4000-8000	3-4	2	4800-8800
RH-DMGL-1000	1000	1500	1500	200	4000-8000	3-4	2	4800-8000
RH-DMGL-2000	2000	2000	2000	200-250	4000-8000	3	3	4800-8000
RH-DSL-3000	2000	2500	2500	200-250	4000-8000	3	3	4800-8000
RH-DSL-3000	3000	3000	2000	300	4000-8000	3	5	4800-8000

*As per customer requirement, technical specification can be changed.

Special Features:

- Optional: Enclosed or unenclosed type; In pit or without pit type
- Easily integrated into existing buildings or rack system
- Controller box at every floor
- Safety devices: Overload warning, emergency down when power off, electrical interlock in case of opening it when working

Application

- Warehouses,
- Distribution Centers,
- Factories,
- Self storage